

**CP-9800DW****ULTRA-FAST, HIGH VOLUME DIGITAL COLOR PRINTER WITH SUPERIOR PERFORMANCE AND LOW OPERATING COST.****Key Features**

- Ultra-fast, large volume printer
- 300 dpi high-density, high-efficiency thermal head
- Adaptive thermal head management engine
- High resolution photo quality prints
- Jam-free, roll-type mechanism
- Edge-to-edge printing
- Easy-to-use, convenient front access for loading media and ink sheet
- High-speed USB 2.0
- Long lasting reliability and quality

Mitsubishi's ultra-high speed, high volume CP-9800DW provides outstanding print quality at a low cost. The CP-9800DW delivers bright, bold colors and achieves an unparalleled level of consistency and accuracy. A 300 dpi thermal head results in even greater image quality, clarity and texture at superior resolutions. Incorporating a roll-type mechanism for jam-free reliability, the CP-9800DW will provide continuous high quality performance. For greater versatility, the CP-9800DW offers four different output sizes with edge-to-edge printing. Get the finest quality prints in a variety of sizes now faster than ever with the Mitsubishi CP-9800DW.

If You Can Create It, We Can Print It.

CP-9800DW

Digital Color Thermal Printer

FEATURES AND SPECIFICATIONS

PREMIUM IMAGE QUALITY

- Mitsubishi's CP-9800DW incorporates high-quality media to deliver rich, black tones, improved color depth, and higher overall image quality.

MITSUBISHI ADAPTIVE THERMAL-HEAD MANAGEMENT ENGINE

- New color management engine provides clear, vivid images, subtle color gradations and realistic skin tone reproduction.

HIGH-SPEED OUTPUT AND IMPROVED DUTY CYCLE

- Provides print speeds of approximately 8 seconds for a single 4 x 6" print. Batch printing enables output of 400 prints per hour (4 x 6" high grade media).

EXTENDED SERVICE LIFE AND IMPROVED PRINT HEAD

- A protective film applied to the head enhances durability, while back-layer ink sheet diminishes wear. May vary depending on external conditions.

USER-FRIENDLY OPERATION

- The easy-access front panel simplifies paper loading and maintenance and includes a paper catch tray with a maximum recommended capacity of 20 prints. (Applies to 3.5 x 5" and 4 x 6" sizes.)

HIGH GRADE MEDIA

- *Premium media for the most realistic images possible.* When used with newly developed High Grade media offering remarkably broad dynamic range* (16% better than standard media), the CP-9800DW achieves sharp, contrast-rich images with the subtlest of tonal gradations. Enjoy superb color reproduction and rich, deep black and images comparable to silver halide photos.

* Density range from black and white

FLEXIBLE INSTALLATION

- Offers choice of two height modes for installation in different locations.
 - Tabletop installation: Attach four 1.18-inch high feet to the printer bottom to create enough space to fold out the front panel flat.
 - Kiosk or rack installation: Since there is no need to attach the four feet, the printer's height is reduced by 1.18 inches.


Print method	Dye sublimation thermal transfer
Resolution	300 dpi
Paper size/capacity	3.5 x 5" (89 x 127 mm) 680 prints/roll 4 x 6" (102 x 152 mm) 600 prints/roll 5 x 7" (127 x 178 mm) 350 prints/roll 6 x 9" (152 x 229 mm) 270 prints/roll
Printing time*	3.5 x 5": approx. 8 sec; 4 x 6": approx. 8 sec; 5 x 7": approx. 16 sec; 6 x 9": approx. 18 sec
Printing area	Edge-to-edge
Buffer memory	32 MB (2 Frame)
Interface	USB 2.0
Driver Software	Windows® XP/2000; Macintosh OS X 10.4 (available via web download only)
Dimensions (W x H x D)	13.0 x 13.9 x 15.9" (329 x 353 x 404 mm) without legs 13.0 x 15.1 x 15.9" (329 x 383 x 404 mm) with legs
Weight	Approx. 46.0 lbs. (21Kg)
Power supply	AC 120V 50/60Hz, AC220-240V 50/60Hz

* High grade media, continuous printing of two copies or more. Does not include data transfer time.

SPECIAL PAPER OPTIONS

Model	Grade	Prints Per Roll	Image Size
CK9035	Standard	680	3.5 x 5" (89 x 127 mm)
CK9046	Standard	600	4 x 6" (102 x 152 mm)
CK9057	Standard	350	5 x 7" (127 x 178 mm)
CK9069	Standard	270	6 x 9" (152 x 229 mm)
CK9046PST	Standard	600 (postcard)	4 x 6" (102 x 152 mm)
CK9035HG	High Grade	680	3.5 x 5" (89 x 127 mm)
CK9046HG	High Grade	600	4 x 6" (102 x 152 mm)
CK9057HG	High Grade	350	5 x 7" (127 x 178 mm)
CK9069HG	High Grade	270	6 x 9" (152 x 229 mm)
CK9046PHG	High Grade	600 (postcard)	4 x 6" (102 x 152 mm)

1. Paper strip bin
2. Print output
3. Door open button
4. Door
5. POWER indicator
6. ALARM indicator
7. PAPER/INK RIBBON indicator
8. DATA indicator
9. READY indicator
10. COOLING indicator
11. FEED & CUT button
12. CANCEL button
13. Output tray
14. Feet
15. USB terminal
16. DIP switch
17. Handle for transporting
18. AC line socket
19. Power switch

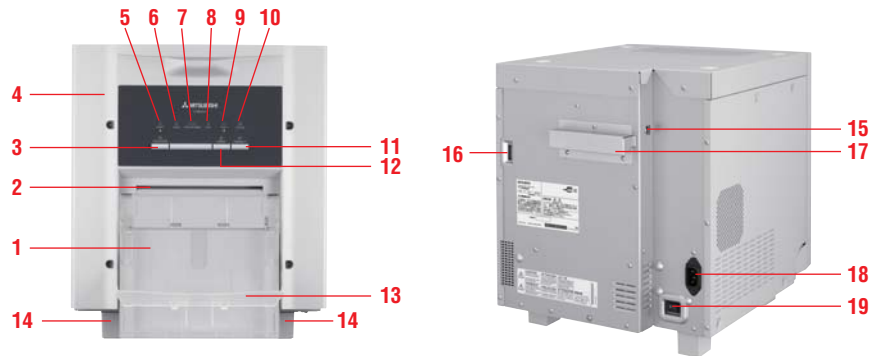

©2007 Mitsubishi Digital Electronics America, Inc. Standard features, options and specifications subject to change without notice. Microsoft, Windows and the Windows logo are registered trademarks of the Microsoft Corporation. All trademarks or registered trademarks are the property of their respective holders.

Printed on 50% recycled paper including 20% post-consumer fibers.



Mitsubishi Digital Electronics America, Inc.
Imaging Products Division
9351 Jeronimo Road
Irvine, CA 92618
Toll Free: 888-307-0388
ipdinfo@mdea.com
www.mitsubishi-imaging.com

Technical Support:
Toll Free: 888-307-0309
Email: tsupport@mdea.com

Canada:
Mitsubishi Electric Sales Canada Inc.
Information Technologies Group
Markham, Ontario
905-475-7728
www.MitsubishiElectric.ca

